

LITTLE SODUS HARBOR - WEST PIER

U.S. ARMY CORPS OF ENGINEERS

BUILDING STRONG®

AUTHORIZATION:


- River & Harbor Acts of 1852, 1871, 1881, and 1902
- Operations & Maintenance

PROJECT SPONSOR:

- 100% federal expense; no sponsor.
- Stakeholders are commercial fishing interests, a private marina, and the recreational boating community.

LOCATION:

- Bottom left photo depicts severe degradation to the steel sheet pile and concrete cap
- Bottom right photo depicts the completed repair that enclosed the degraded pier

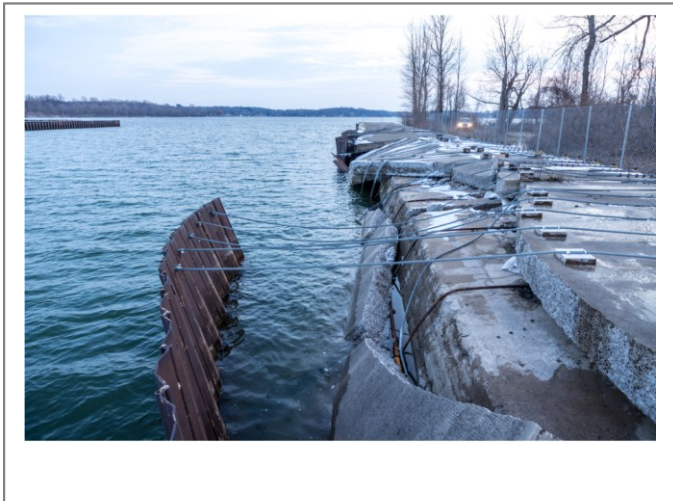

24 December 2021



5 December 2022

Congressional Member Interest	Key Stakeholder Interest
Representative Claudia Tenney R-NY-24	Village of Fair Haven, NY
Senator Kirsten Gillibrand D NY	
Senator Charles Schumer D NY	

PROJECT DESCRIPTION AND BACKGROUND:

- Sections of the steel sheet pile wall along the channel side of the west pier separated from the concrete cap
- The west pier allows for safe navigation between Little Sodus Bay and Lake Ontario, and protects the adjacent barrier bar

As of: 03/23/2023

U.S. Army Corps of Engineers – Buffalo District
 1776 Niagara Street, Buffalo, NY 14207
<http://www.lrb.usace.army.mil>

BUDGET INFORMATION:

Authorized Total Project Cost	\$10,000,000
Non-Federal Sponsor Cost	N/A
Federal Cost	\$4,000,000
Federal Funding Received Prior to FY24 President Budget	\$10,000,000
FY24 President Budget	TBD

CURRENT STATUS:

- The repair removed the separated sheet pile, and enclosed the entire pier with new sheet pile, tie rods, walers, granular fill, and a new concrete cap
- Construction completed in December 2022

Project POC:

Lex Barker, lex.c.barker@usace.army.mil, 716-879-4135

As of: 03/23/2023

U.S. Army Corps of Engineers – Buffalo District
1776 Niagara Street, Buffalo, NY 14207
<http://www.lrb.usace.army.mil>